


BBL WK 355 B

BBL
CRANES

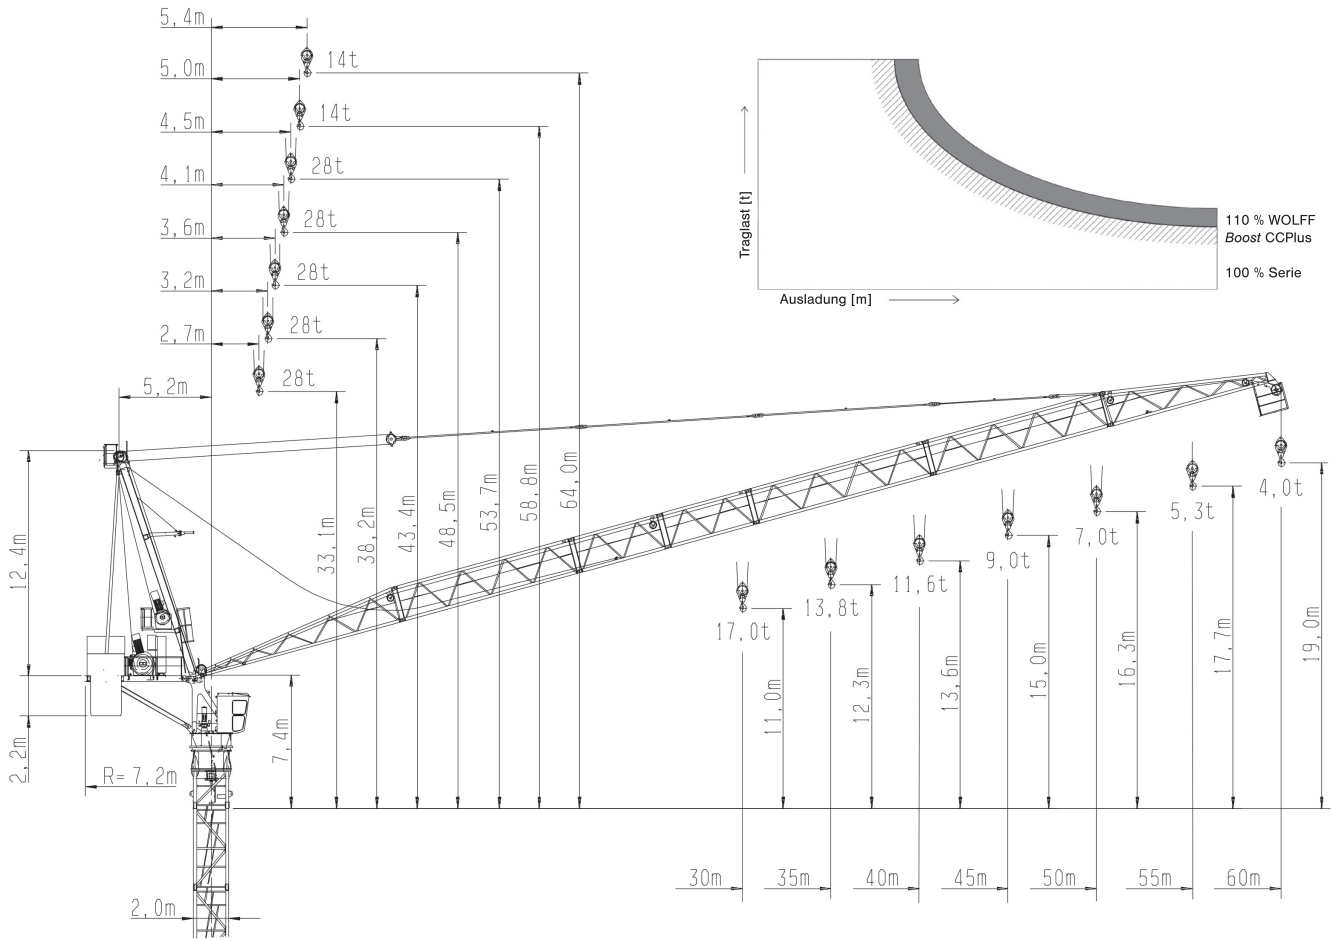

Ausladung (m)	20,0	25,0	30,0	35,0	40,0	45,0	50,0	55,0	60,0
---------------	------	------	------	------	------	------	------	------	------

Auslegerlänge (m)	60,0	55,0	50,0	45,0	40,0	35,0	30,0	25,0	20,0	Traglast (t)
60,0	5,4 - 27,0	14,0	14,0	12,2	9,8	8,1	6,7	5,6	4,7	4,0
55,0	5,0 - 28,0	14,0	14,0	12,8	10,5	8,7	7,3	6,2	5,3	
50,0	4,5 - 29,5	14,0	14,0	13,7	11,3	9,5	8,1	7,0		
45,0	4,1 - 31,0	14,0	14,0	14,0	12,2	10,4	9,0			
40,0	3,6 - 33,5	14,0	14,0	14,0	13,4	11,6				
35,0	3,2 - 34,5	14,0	14,0	14,0	13,8					
30,0	2,7 - 30,0	14,0	14,0	14,0						

14,0 t

Ausladung (m)	20,0	25,0	30,0	35,0	40,0	45,0	50,0	55,0	60,0
---------------	------	------	------	------	------	------	------	------	------

Auslegerlänge (m)	60,0	55,0	50,0	45,0	40,0	35,0	30,0	25,0	20,0	Traglast (t)
60,0										
55,0										
50,0	4,5 - 16,0	21,7	16,7	13,4	11,0	9,2	7,8	6,7		
45,0	4,1 - 16,5	22,7	17,6	14,3	11,9	10,1	8,7			
40,0	3,6 - 17,0	23,6	18,7	15,4	13,1	11,3				
35,0	3,2 - 17,5	24,4	19,3	15,9	13,5					
30,0	2,7 - 18,0	25,3	20,3	17,0						

28,0 t

	Motor FU (kW) m/min	110 0 - 185	110 0 - 92
	Motor (kW) min	75,0	1,8
	Motor (kW) r.p.m.	7,5	0,80

Krankabel	95 120 mm ² (je nach Höhe)
Anschlussleistung	194 kVA
Erforderliche Absicherung	200 A